



A c c e s s o r i e s   f o r   P u m p s

# Multifunction VALVE

PRESSURE, SAFETY, ANTI-SYPHON and BLEED

- Selecionable working pressure!
- Easy-to-use knobs, with stop position!
- Reinforced Polypropilene or PVDF body!



Features	Multifunction Valve
Safety valve working range	from 0 to 18 bar
Pressure valve working range	from 0 to 5 bar
Fittings	1/2", 3/8"
Discharge hose fittings	4x6
Construction material (body)	PP or PVDF
Liquid ends material	PP or PVDF
Seal	Viton® or EPDM
Membrane	Viton® or EPDM

Viton® is a DuPont Dow Elastomers registered trademark.

## PRESSURE valve operating mode

Pressure valve operating mode keeps always closed the valve until is reached a specific pressure value to the input.



## ANTI-SYPHON valve operating mode


Anti-syphon operating mode avoid that dosing product goes through the injection valve when the pump is not dosing because a negative pressure has been produced on the injection valve.

## SAFETY valve operating mode

Safety-valve operating mode activates product discharge when is over-reached a specific pressure value (max 18bar).

## BLEED valve operating mode

Manual product discharge on delivery hose.

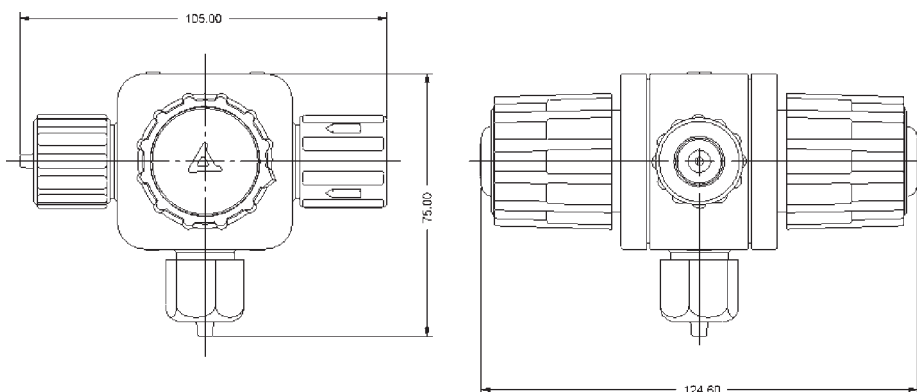

Dimensions are expressed in mm.

**ATA S.r.l.**  
 Via Molinello 38 16035 Rapallo (GE)  
 Tel. +39 0185263015 Fax +39 0185260114  
 Http://www.atasrl.it e-mail:atasrl@atasrl.it  
 P.iva 03588120109

**sistemi di dosaggio  
 trattamento acque  
 fertirrigazione  
 automazione**